

The global leader in
multi-platform **MLPE** technology





ECU-R

Energy Communication Unit

- Collection and transmission of inverter data
- Real time monitoring of each inverter
- Built-in WiFi
- Small size, flexible installation

DIMENSION

The APsystems Communicator, our state-of-the-art Energy Communication Unit (ECU-R), is the information gateway for our APsystems inverters. It collects and transfers module performance data in real time, giving you comprehensive monitoring and control over each individual module, optimizing the performance of your solar array.

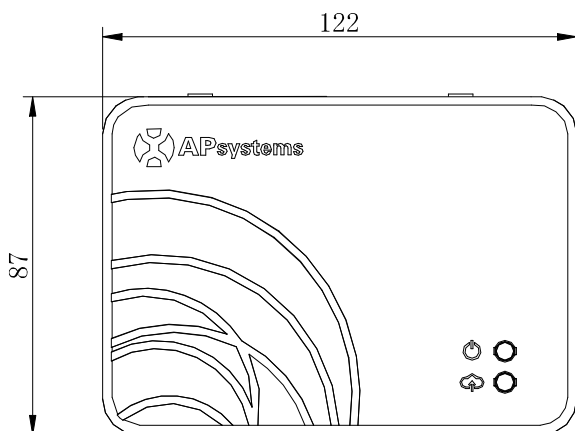

ECU-R Datasheet

Communication Interface

Integrated Wi-Fi	802.11g/n
Communication	ZigBee 2.4 GHz
Ethernet	10/100M Auto-sensing, Auto-negotiation
Wireless security	WEP, WPA2-PSK
USB Interface	5Vdc-0.5A Output X2

Power Date

Power Supply	120~240VAC , 50-60Hz 5V 2A
Power Consumption	1.7 W

Mechanical Data

Dimensions(W×H×D)	122 mm×87 mm×25 mm(4.8"x3.4"x0.98")
Weight	150 g(0.33lbs)
Ambient Temperature Range	-20°C to +65°C(-4°F to +149°F)
Cooling	Nature Convection; No Fans
Enclosure Environmental Rating	Indoor - NEMA 1(IP20)

Features

Compliance	IEC 60950-1, EN60950-1, IEC 60529, EN 60529, ANSI/UL 60950-1, CAN/CSA C22.2 No.60950-1, UL50E, FCC part 15, EN61000-6-1, EN61000-6-3, ICES-003, AS NZS 60950-1, GB/T17799
------------	---

© All Rights Reserved

Specifications subject to change without notice - please ensure you are using the most recent update found at www.APsystems.com

600 Ericksen Ave NE, Suite 200 Seattle, WA 98110 | 844.666.7035 | APsystems.com

Please use mobile browser to scan the QR codes to download ECU APP :



(Android)



(iOS)